



玖玖新陶
DNT CERAMIC

佛山市玖玖新陶科技有限公司

FOSHAN DOUBLE NINE CERAMIC TECHNOLOGY CO., LTD.



佛山市玖玖新陶科技有限公司

FOSHAN DOUBLE NINE CERAMIC TECHNOLOGY CO., LTD.

地址：佛山市禅城区郊边松田工业区三排14号二楼
Add: NO. 14 Jiaobian songtian Industry Zone, Chancheng
District, Foshan, Guangdong, China

Post Code: 528000

Tel: 0086-757-82535600 82969585 83872726

Fax: 0086-757-82966589

E-mail: dntceramic@yahoo.com.cn

佛山市玖玖新陶科技有限公司是一家以科技带动产品销售的集科研和工贸一体化的综合公司。公司生产和经营的产品以陶瓷化工原料材料为主，涉及瓷砖的整个工艺流程，包括陶瓷釉料、色料、印花材料、增强剂以及产品的表面处理防污剂等。公司拥有大批尖端的陶瓷工艺工程师，能为客户提供全面、良好的陶瓷工艺技术服务。公司的业务范围涵盖国内国外，以国外尤其是东南亚为主。

“为客户创造更多的价值，让员工得到更大的回报”是我们一贯的经营理念，在实践中我们坚持两个路线：一是产品路线，以帮助客户降低生产成本为目的，开发性能超强，性价比高的材料；二是客户路线，以帮助客户提高产品竞争力为目的，帮助客户开发市场适销对路优势产品。

公司自成立以来便以“高效”、“快速”“贴身”的技术服务和优质价廉的产品获得较快和健康的发展。

合作共赢是我们的经营宗旨，相信我们的合作会给予你更好的回报！

FOSHAN DOUBLE NINE CERAMIC TECHNOLOGY CO., LTD. is a comprehensive company, which combined scientific research, manufactory and trade and promoted the sale by the technology. The production and management of products mainly by ceramic chemical raw materials, which relating to the whole technological process of ceramic which included ceramic glaze, pigment, printing materials, binder and anti-fouling agent etc.. The company has large quantities of advanced engineers who are good at ceramic process, and can provide the comprehensive, good ceramic technology service for customers. The business scope of our company covers at home and abroad, mainly in abroad and especially in Southeast Asia.

"Reate more value for customers, return more welfare to employees" is our consistent management concept. In practice we insist on two routes: First is the products, it is our target to reduce the production cost for customer and develop the materials which are higher quality, lower price and better properties ;Second is the customers, it is our target to help customer enhance product competition ability and develop the products which are advantage, marketable and popular.

Since the establishment, the company obtained fast and healthy development depending on "efficient" "fast" "personal" technical service and excellent products.

Win-win cooperation is our management aim, we believe that our cooperation will give you better returns.



防污剂系列
WAX SERIES

坯体增白剂
BRIGHTENER FOR BODY

坯体增强剂
BINDER FOR BODY

坯体减水剂DC-67
DEFLOCCULATING AGENT DC-67 FOR BODY

坯、釉用色料
BODY AND GLAZE PIGMENT

渗花釉系列
SOLUBLE SALT SERIES

印花助剂系列
PRINTING AUXILIARY SERIES

成品釉系列
COMPOUND GLAZE SERIES

普通防污剂 COMMON WAX SERIES

KF系列普通防污剂适用于抛光砖的普通防污，配方中含有交联成份，施于抛光砖面时，与瓷砖表面和毛细孔表面发生交联反应，使防污剂和瓷砖表面结合更牢固，使防污剂的有效防护期更长。

KF series common wax series are suitable for polishing tile which ingredient has cross-linking agent. Spraying the KF on the surface of polishing tile, which will effect the cross-linking reaction with surface and pinholes of tile. This reaction will make common wax and tile surface combining firmer and make common wax were effective protective period is longer.

纳米防污剂 NANOMETER SUPER WAX SERIES

NANO系列纳米防污剂是采用最新的纳米科技研制而成，是目前市场上应用于陶瓷抛光砖防污，增亮防滑，绿色环保的高科技的最新产品。

- 纳米渗透 完全防污
- 特殊工艺 有效防滑
- 镜面镀膜 强力增亮
- 防辐杀菌 安全环保

NANOMETER SUPER WAX series made with the newest nanometer technology, is used on polished tiles for anti-fouling, shininess increase and anti-slip. It is the newest type of Hi-Tec product for green environment protection


- Nanometer Infiltration, Complete Anti-fouling.
- Special Technics, Effective Anti-slip.
- Mirrored Film-plating, Sharp Shininess Increase.
- Anti-radiation, Sterilization, With Safety and Environment Protection

产品性能 PRODUCT FEATURES:

NANO 系列纳米防污剂由 A、C 两种组分组成，其中 A 组分为乳白色透明液体，施于抛光砖表面并经打磨后，完全堵塞了抛光砖的表面气孔及微裂纹，形成一层特殊的亲水性结构及连续致密的纳米膜，表面光亮洁净，从而使抛光砖表面可阻止一切污染物入侵。C 组分有两个系列，CO 为油性透明液体，CW 为水性环保型乳白色液体。在施过 A 组分的砖面，再施 C 组分，

在砖表面形成疏水层，沾在砖面上的污染物可轻易的用抹布加水清洁干净，令砖面历久常新，同时极大的提高砖面的光洁度（最大可达90-100度以上）。

NANOMETER SUPER WAX is colorless transparent or milk liquid without flammability, when it was spraying on the polished tile surface and being grinded, it can wall up the micro air-hole and cracks and then firm a lay of special hydrophilic structure and a nanometer film with continuous closed structure, which makes the surface shining and clean. Thus it can stop the fouling sticking on the tile surface, or any fouling can be easily removed with dishcloth and water, that make it the tile surface looks new in a long term. Meanwhile, it can increase sharply the tile surface shininess (Max.Up to 90 - 100degrees).

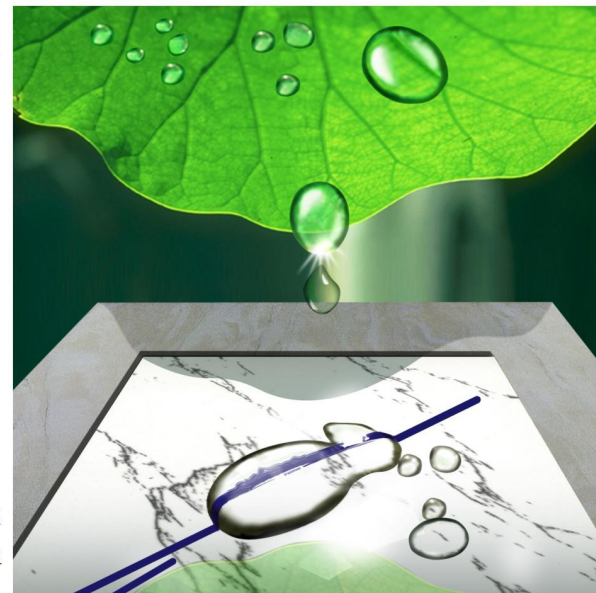

产品参考使用方法 PRODUCT REFERENCED USAGE

NANO 系列纳米防污剂必须通过特殊的纳米抛光、镀膜设备配合使用才能达到效果。

NANO series super wax must work with special grinding and film-plating equipments can it reach the actual effects.

名称 Name	编号 Code	外观 Appearance	用途和性能 Application and Feature	保质期 Guarantee Period	包装规格 Packing Specification
普通防污剂 Common wax	KF01	透明液体 Transparent Liquid	在瓷砖表面形成疏水涂层，改善抛光砖的防污性能 Shaping the hydrophobic coating in the surface of tile, improving the antifouling properties of polishing tile	一年 One year	140KG铁桶 140KG/ Metal Bucket
纳米防污剂A Nanometer super wax A	NANO-A	无色或乳白色透明液体 Colorless or Opaque Transparent Liquid	填充抛光砖表面毛孔，提高抛光砖的光泽度及抛光砖的防污性能。 Filling the pinholes of polishing surface, improving the glossiness and antifouling properties of polishing tile	6个月 Six month	200KG胶桶 200KG/Plastic Bucket
纳米防污剂CO Nanometer super wax CO	NANO-CO	油性透明液体 Oil transparent Liquid	在抛光砖表面形成疏水涂层，防止污染物的污染。 Shaping the hydrophobic coating in the surface of tile, anti the pollutant.	一年 One year	140KG胶桶 140KG/Plastic Bucket
纳米防污剂CW Nanometer super wax CW	NANO-CW	水性环保型乳白色液体 Water environmental Opaque Liquid	作用同NANO-CO Shaping the hydrophobic coating in the surface of tile, anti the pollutant.	一年 One year	200KG胶桶 200KG/Plastic Bucket

防污剂使用方法 WAX USAGE


KF01使用方法：KF01 USAGE

抛光砖→干燥→滴加KF01→打磨抛光→检验→包装（或用手直接均匀涂于经抛光干燥的砖面包装）
Polishing tile→Drying→Dropping KF01→Polishing→Inspection→Packing (or coat the KF01 in the surface of polishing tiles symmetrically and directly by manual)

纳米防污剂使用方法：NANO SUPER WAX USAGE

抛光砖→机械滴施A液→抛光→机械滴施A液→抛光……（不同的设备可能有不同的重复过程）→滴施C液→抛光→检验→包装。
Polishing tile→Machine dropping NANO A→Polishing→Machine dropping NANO A→Polishing……(Different equipment may have different repeat process) →Dropping NANO C→Polishing→Inspection→Packing

图片说明：ILLUSTRATION

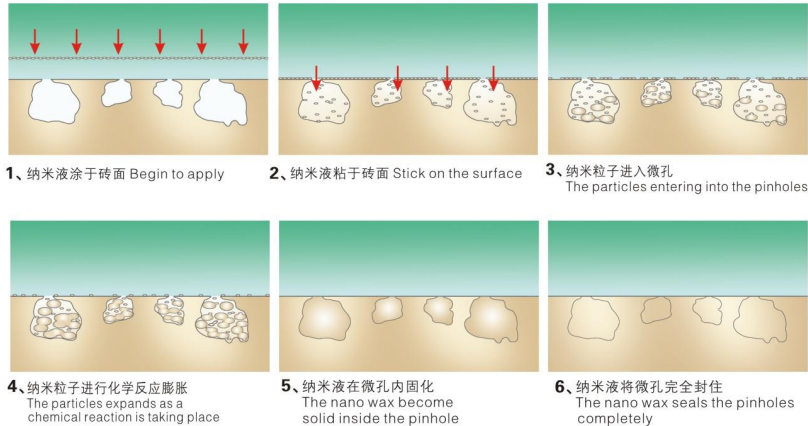

坯体增白剂 BRIGHTENER FOR BODY

坯体增白剂 BRIGHTENER FOR BODY

此坯体增白剂为我公司最新研发的新产品，用于对坯料白度要求较高的抛光砖生产，加入坯料中可大大提高坯料的白度。因此产品中不含锆成份，在使用中不用担心辐射问题。比使用硅酸锆增白更环保。此产品也可用于内墙瓷片底釉（化妆土）的增白。

This brightener is a new product of our company, the tile whiteness can be increase with this brighter, so it is suitable for polishing tile produce. There is not ZrSiO₄ in this product, so the radioactive is not be consider in the produce process and using process. This product may be used for engobe of glaze wall and floor tile.

编号 code	细度 (目) mesh	白度 whiteness	用量 Dose
DW90	325	90	1~15%
DW97	325	97	1~15%

坯体增强剂 BINDER FOR BODY

本公司的坯体增强剂分两个系列：粉状固体增强剂和液体增强剂。两个系列的增强剂都可加入球磨机与原料一起球磨。液体增强剂也可直接按所用量加入磨好的浆料中充分搅拌均匀，其不会增加浆料的粘度，不会改变浆料的流动性能。

Our company's body binder has two series: Powder form solid binder and liquid form binder. All two series binders can be put into the ball mill and mill it with the raw materials. The liquid form binders can be put to the slurry according as the regular dosage directly and mix it symmetrically, which will not change the slurry's viscosity and will not change the slurry's fluidity.

名称 Name	编号 Code	外观 Appearance	用途和性能 Application and Feature	保质期 Guarantee Period	包装规格 Packing Specification
坯体增强剂 Body Reinforcing Agent	DBS-01	白色粉末 White powder	提高生坯强度， Increase the strength of green body	一年 One year	25KG袋装 25KG/bag
坯体增强剂 Body Reinforcing Agent	DBL-02	透明粘稠液体 Transparent Ropy Liquid	大大提高生坯强度，可在配方 中减少粘土用量。Increase the strength of green body and reduce the dosage of clay	一年 One year	200KG桶装 200KG/Plastic Bucket
坯体增强剂 Body Reinforcing Agent	DBL-03	乳白粘稠液体 Milk white ropy liquid	大大提高生坯强度，可在配方中 减少粘土用量，适用与卫生洁具 Increase the strength of green body and reduce the dosage of clay. It is suitable with the sanitary ware.	一年 One year	50KG/200KG桶装 50KG/plastic bucket or 200KG/plastic bucket

坯体减水剂 DC-67 DEFLOCCULATING AGENT DC-67 FOR BODY

坯体减水剂 DEFLOCCULATING AGENT















DC-67减水剂为液体减水剂，与常用减水剂水玻璃相比，可以减小生坯的脆性，提高生坯强度；减水能力达到STPP的性能，为无磷减水剂，比STPP更环保。建议用量为0.1-0.3%，使用时与原料按比例一起加入球磨机球磨即可。

DC-67 deflocculating agent is a liquid deflocculating agent, comparing with the common sodium silicate, which reduce the brittleness of green bodies and improve the strength of green bodies, which is non-phosphate deflocculating agent and its deflocculating capability can achieve the STTP performance and greener than STTP. Proposal dosage is 0.1%-0.3%, put it into the ball mill, and mill it with raw materials in Proportion.

坯用色料系列 BODY PIGMENT SERIES

适用于陶瓷制品的坯体着色，根据客户自身的需求而有不同的色料添加量及使用方法。细度：325目筛余量≤1%，含水率≤0.5%。

Body Pigments are suitable for coloring the ceramic body, which are various of additive dosages and use methods for users' different requirements. Grain:325 mesh screen residue ≤1%, water percentage ≤0.5%.

编号 Code	颜色 Color	成分 Components	最高烧成温度 Max.Firing Temp.	备注 Remarks	色调 Color Stain
KX1001B	中国红 China red	Fe	1200°C	适合不含熔剂坯体 For non-flux body	
KX1303	珊瑚红 Coral red	Al-Fe	1250°C	适合各种坯体 For all bodies	
KX1031B	锰红 Manganese red	Mn-Al	1250°C	适合各种坯体 For all bodies	
KX1621B	沙漠红 Desert red	Zr-Fe-Si	1250°C	适合各种坯体 For all bodies	
KX2035B	桔黄 Orange yellow	Ti-Sb-Cr	1250°C	适合各种坯体 For all bodies	
KX2036B	桔红 Orange red	Ti-Sb-Cr	1250°C	适合各种坯体 For all bodies	
KX3038B	锆黄 Pr-yellow	Zr-Si-Pr-Ce	1250°C	适合各种坯体 For all bodies	
KX3088B	锆黄 Pr-yellow	Zr-Si-Pr-Ce	1250°C	适合各种坯体 For all bodies	
KX3154B	土黄 Earth yellow	Zr-V	1250°C	适合各种坯体 For all bodies	
KX4302B	钴兰 Co-blue	Co-Al	1300°C	适合各种坯体 For all bodies	
KX4503B	钒钴兰 V-Zr-blue	Zr-Si-V	1250°C	适合各种坯体 For all bodies	
KX6001B	孔雀绿 Peacock green	Zn-Co-Cr-Al	1250°C	适合各种坯体 For all bodies	
KX6002B	孔雀绿 Peacock green	Zn-Co-Cr-Al	1250°C	适合各种坯体 For all bodies	
KX6033B	铬绿 Chromium green	Cr-Al	1300°C	适合各种坯体 For all bodies	
KX6035B	绿色 Green	Cr-Al	1300°C	适合各种坯体 For all bodies	
KX8052B	咖啡色 Coffee	Cr-Fe-Zn	1300°C	适合各种坯体 For all bodies	
KX8053B	咖啡色 Coffee	Cr-Fe-Ti	1300°C	适合各种坯体 For all bodies	
KX9023B	黑色 Black	Cr-Fe-Co-Mn	1250°C	适合各种坯体 For all bodies	



注意：由于印刷有少许偏差，颜色以实际色板为主。
Note: Color deviation may exist during printing.

釉用色料系列

GLAZE PIGMENT SERIES

适用于内、外墙地砖、卫生洁具陶瓷、日用陶瓷等表面装饰着色，根据客户自身的需求而有不同的色料添加量及使用方法。细度：325目筛余量≤0.5%，含水率≤0.5%。

Glaze pigments are suitable for indoors & outdoors wall tile, sanitary ware, and daily used ceramics. There are various of additive dosages and use methods for users' different requirements. Grain: 325 mesh screen ≤0.5%, water percentage≤0.5%.

编号 Code	颜色 Color	成分 Components	最高烧成温度 Max. Firing Temp.	备注 Remarks	色调 Color Stain
KX1073	包裹红 Included Red	Zr-Si-Cd-Se	1300°C	适合各种釉料 For all glazes	
KX3701	包裹黄 Included yellow	Zr-Si-Cd-Se	1300°C	适合各种釉料 For all glazes	
KX1004	锆铁红 Coral pink	Zr-Si-Fe	1250°C	适合各种釉料 For all glazes	
KX1223	玛瑙红 Maroon red	Sn-Cr-Ca-Si	1250°C	适合无锌高钙釉 For non-Zn, HI-Ca glaze	
KX3038	锆黄 Pr-yellow	Zr-Si-Pr	1250°C	适合各种釉料 For all glazes	
KX3088	锆黄 Pr-yellow	Zr-Si-Pr	1250°C	适合各种釉料 For all glazes	
KX4008	钒兰 V-blue	Zr-V-Si	1300°C	适合各种釉料 For all glazes	
KX4103	孔雀蓝 Peacock blue	Co-Cr	1250°C	适合各种低锌釉 For low-Zn glaze	
KX4201	宝石兰 Lapidary blue	Co-Si	1250°C	适合各种釉料 For all glazes	
KX4302	钴兰 Co-blue	Co-Al	1250°C	适合各种釉料 For all glazes	
KX4302	钴兰 Co-blue	Co-Al	1250°C	适合各种釉料 For all glazes	
KX5002	红棕 Red brown	Fe-Cr-Zn-Al	1250°C	适合含锌釉 For Zn glaze	
KX5202	金棕 Cold brown	Fe-Cr-Zn-Al	1250°C	适合含锌釉 For Zn glaze	
KX5203	黄棕 Yellow brown	Fe-Cr-Zn-Al	1250°C	适合含锌釉 For Zn glaze	
KX5302	金黄 Golden yellow	Fe-Cr-Zn	1250°C	适合含锌釉 For Zn glaze	
KX5305	金红 Golden red	Fe-Cr-Zn	1250°C	适合含锌釉 For Zn glaze	

注意：由于印刷有少许偏差，颜色以实际色板为主。
Note: Color deviation may exist during printing.

编号 Code	颜色 Color	成分 Components	最高烧成温度 Max. Firing Temp.	备注 Remarks	色调 Color Stain
KX6001	孔雀绿 Peacock green	Co-Cr	1250°C	适合各种低锌釉 For low-Zn glaze	
KX6203	苹果绿 Apple green	Zr-Pr-V-Si	1250°C	适合各种釉料 For all glazes	
KX8001	银灰 Sivery grey	Sn-Sb	1250°C	适合各种釉料 For all glazes	
KX9603	釉黑 Glazy black	Ni-Mn-Cr-Fe-Cu	1250°C	适合各种低锌釉 For low-Zn glaze	










渗花釉系列 SOLUBLE SALT SERIES

本公司制造的各种渗花着色盐、液体渗花釉及助渗剂系列，适用于各类坯体，具有渗透力强、发色强、制作工艺严谨及质量稳定的特点。

We manufacture various of soluble salts, liquid form soluble salt and penetrating auxiliary series, which are suitable for kinds of tile body, strong penetrability, powerful coloring, strict craft and stable quality.

液体渗花釉系列

LIQUID FORM SOLUBLE SALT SERIES

编号 Code	外观 Appearance	发色 Color development	白坯发色 Color chart in normal body	黄坯发色 Color chart in yellow body
KY106	紫红色液体 Purple Red liquid	蓝色 Blue		
KY298	蓝绿色液体 Blue-Green liquid	棕色 Brown		
KY285	兰棕色液体 Bluish brown liquid	棕色 Brown		
KY477	深绿色液体 Dark Green liquid	黄绿色 Yellow-green		
KY611	粉红色液体 Pink liquid	灰色 Grey		
KY256	绿色液体 Green liquid	黄色 Yellow		
KY901	黑色液体 Black liquid	黑色 Black		

注意：由于印刷有少许偏差，颜色以实际色板为主。
Note: Color deviation may exist during printing.

固体渗花盐系列 SOLID FORM SOLUBLE SALTS

编号 code	外观 Appearance	溶解度(%) Solubility	发色 Color development	白坯发色 Color chart in normal body	黄坯发色 Color chart in yellow body
KS204	翠绿色粉末 Green powder	≥30	棕色 brown		
KS303	深绿色晶体 Dark green powder	≥25	黄棕色 Yellow brown		
KS405	黄色晶体 Yellow crystal	≥40	白坯黄绿色 Yellowish green in normal body 黄坯黄色 Orange in yellow body		
KS103	粉红色晶体 Pink crystal	≥30	蓝色 blue		
KS901	黑色粉末 Black powder	≥30	黑色 black		
KS003A	白色晶体 White crystal	≥30	白色 white		
KS001	白色晶体 White crystal	≥30	黄坯中发柠檬黄色 lemon yellow in yellow body		

渗花助剂系列 PENETRATING AUXILIARY SERIES

本系列产品为我公司最新开发的渗花助剂，能加大渗花釉在坯体上的渗入深度，并使渗入深度得到平衡，减少色差。能有效的改善高浓度渗花釉易结晶沉淀的弊端。

This series product was developed by company newly, which can increase the penetration depth of soluble salt in tile body and balance the penetration depth to reduce the color difference, which improve the flaw of the high concentration soluble salt easily crystallized precipitation.

名称 Name	编号 code	外观 Appearance	常用量 Usual Dose	用途 Usage
助渗剂 Penetrating auxiliary	KH03	白色晶体 White crystal	10~20%	助渗 To improve penetration
助渗剂 Penetrating auxiliary	KH02	白色晶体 White crystal	10~20%	助渗 To improve penetration
增稠剂 Thickening agent	CMC - I	白色短纤维状粉末 White short-staple powder	2~3%	增稠 Thicken Paste
	CMC - II	白色粉末 White powder	5~7%	增稠 thicken Paste
分散剂(乙二醇) Glycol	Glycol	无色透明液体 Colorless transparent liquid	增稠剂的2倍 Double of Thickening agent	分散增稠剂，使其在生产渗花釉时，不结块。 Dispersant for thickening agent, preventing the clotting when produce the soluble salt

印花固定剂 PRINTING FIXING AGENT

在釉面砖生产的印花工序经常会发生粘网现象。本公司开发生产的固定剂可有效解决这一问题。There have screen sticking phenomena when produce the glaze tile, which can be solved by printing fixing agent which develop by our company.

A、GF适用于强度和粘性不高容易起粉的釉料，如金属釉等，在施釉时，把本品加入釉料中，施釉后，釉料与坯体或底釉结合牢固，釉面不起粉，减少了印花时的粘网问题（此固定剂又称釉料增强剂，加入釉料中不会改变釉料的流速等重要性能）。

GF is suitable for the glazes which strength and stickiness are not good and get powder easily, such as metallic glaze. Putting the GF to the glaze when spray the glaze, after that, the glaze can combine with body or engobe securely and will not get the powder easily, which reduce the screen sticking frequently. (This fixing agent also call glaze binder, which will not change the important feature as like viscosity after put it into the glaze).

B、PF适用于在印花过程中，花釉起粉引起的粘网。印花后，喷施少量的PF固定剂，在已经印花的釉面形成一层薄膜，使花釉不起粉，以减少下一次印花的粘网现象。


PF is suitable for the printing processing, and can solve the problem of screen adhesion. After printing, spray a small quantity of PF fixing agent, which will form a film in printed glaze and avoid the powder in order to reduce the screen adhesion in next operation.

名称 Name	编号 code	外观 Appearance	比重 Proportion	常用量 Usual Dose	用途 Usage
印花固定剂 Printing fixing agent	GF	透明粘稠液体 Transparent thickness liquid	1.25 - 1.35	釉料总量的1~2% 1-2% of glaze volume dose	增强釉料强度 Increase the strength of glaze
	PF	透明粘稠液体 Transparent thickness liquid	1.03 - 1.07	用10~20%PF与水配成溶液，30~50g/m ² Use 10-20% PF match with water to get the solution 30-50g/m ²	减少粘网 Reduce the screen adhesion

印油系列 PRINTING MEDIUM SERIES

胶辊印油 ROTO PRINTING OIL

RP863胶辊印油是一种具有极佳流变特性的印刷介质，具有良好的润湿性、悬浮性、分散性，与印刷釉、色料混合后长期放置不易沉淀、分层和挥发，性能极其稳定。RP863印刷流畅，印出来的图案清晰、细腻，具有很强的立体感及层次感，尤其适用于瓷片的滚筒印花及仿古砖印花。

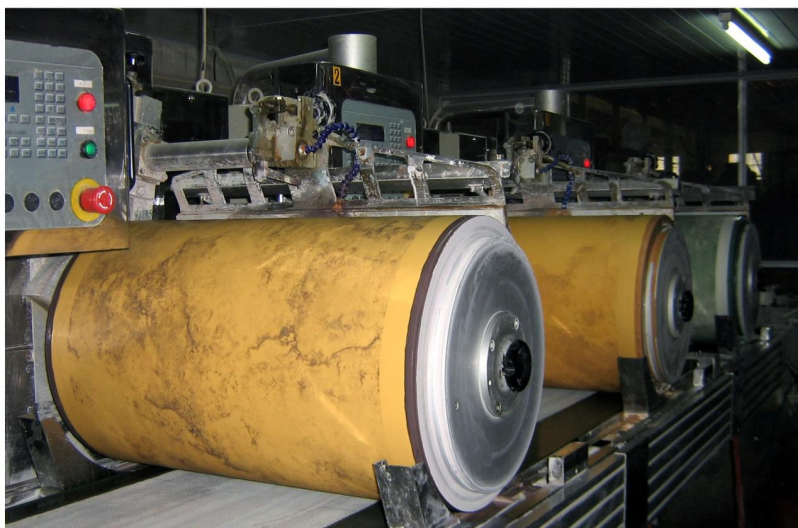

RP863 roto printing oil is a kind of printing medium with excellent fluidness, moistening, suspensibility, and dispersibility. After being mixed with printing glaze/color material, there is no deposit, lamination, reaction, nor volatilization with all steady functions of smooth printing for a long time, clear printing patterns, delicate and strong stereo sensation, no color variation. Especially applicable for roto printing for indoor wall tile and rustic tile.

平板印油 FLAT PRINTING MEDIUM

PM系列印油适用于仿古砖及内墙砖的平板印花操作，此系列印油具有高流动性，高润滑性，不易粘网等特性，印花后，花釉不起粉，避免了多版印花时的粘网现象，在生产中可不必再喷固定剂，使用过程更环保。

PM series are suitable for flat printing of rustic floor tile and indoor wall tile. It has excellent fluidness, lubricity, and no sticking. The paste doesn't become powder after printing, so there are no sticking during multi printing, during printing with this series printing medium, the fixative is not necessary.



名称 Name	编号 code	外观 Appearance	性能 Feature	保质期 Guarantee Period	包装规格 Packing Specification
胶辊印油 Roto Printing oil	RP863	半透明或乳白液体 Semi-transparent or milky liquid	具有出色的温度稳定性和悬浮性，特别适合一次性烧的多辊釉上或釉下印花。 Excellent temperature stability and suspensibility, especially suitable for on-glaze coloring or under-glaze coloring roto printing	一年 One year	1000KG胶桶 1000KG Plastic bucket
平板印油 Flat printing medium	PM80	半透明或乳白液体 Semi-transparent or milky liquid	无毒水性配方，润滑性特佳，减少擦版次数，在网版上不干涸、无粘版。 Non-toxic water base formula, excellent lubricity, reducing the scratch frequently, no screen sticking	一年 One year	1000KG胶桶 1000KG Plastic bucket
平板印膏 Flat printing medium	PM90	半透明或乳白液体 Semi-transparent or milky liquid	印刷效果完美，印刷后图案花纹坚实、强度佳，可多版印刷。 Excellent printing effect with sharp and strong pattern, suitable for multi printing	一年 One year	1000KG胶桶 1000KG Plastic bucket

成品釉系列 COMPOUND GLAZE SERIES

本公司开发生产的陶瓷成品釉有仿古哑光釉系列、金属效果釉系列、底釉系列、全抛釉系列及成品印刷釉系列等。

Our company develop the compound glaze have rustic floor tile glaze series, Metallic glaze series, Engobe series, Full polishing glaze and compound printing glaze series.

仿古哑光釉 RUSTIC FLOOR TILE GLAZE SERIES

编号 code	膨胀系数 Expansion C.O.E × 10 ⁻⁶	适用温度 (°C) Suitable Temp.	使用说明 Instruction
KG4850	205	1130~1170	适用于一次烧成墙地砖，釉面哑光效果好，发色好， Suitable for single firing wall & floor tiles with good matt effect and strong coloring ability
KG4851	197	1170~1200	适用于一次烧成墙地砖，釉面哑光效果好，发色好 Suitable for single firing wall & floor tiles with good matt effect and strong coloring ability
KG4881	193	1190~1230	适用于一次烧瓷质仿古砖，釉面哑光效果好，发色佳 Suitable for single firing rustic floor tiles with good matt effect and strong coloring ability
KG4851B	199	1170~1200	适用于一次烧成墙地砖，釉面哑光效果好，白度好，发色好 Suitable for single firing wall & floor tiles with good matt effect, perfect whiteness and strong coloring ability
KG4881B	197	1190~1230	适用于一次烧瓷质仿古砖，釉面哑光效果好，白度好，发色佳 Suitable for single firing rustic floor tiles with good matt effect, perfect whiteness and strong coloring ability

全抛釉系列 FULL POLISHING GLAZE

编号 code	类别 Category	适用温度 (°C) Suitable Temp.	使用说明 Instruction
DG1101	全抛釉面釉 Full polishing surface glaze	1180~1220	用于全抛釉砖的面釉 Suitable for the surface glaze of full polishing tile
DG1106	全抛釉面釉 Full polishing surface glaze	1180~1220	用于全抛釉砖的面釉 (淋釉) Suitable for the surface glaze of full polishing tile (bell flow glaze)
DP1102	全抛釉印刷釉 Suitable for the printing glaze of full polishing tile	1160~1180	用于用来抛光的印刷釉 Suitable for the printing glaze of polishing
DP1103	全抛釉印刷釉 Suitable for the printing glaze of full polishing tile	1160~1180	用于用来抛光的印刷釉 Suitable for the printing glaze of polishing
DP1104	全抛釉印刷釉 Suitable for the printing glaze of full polishing tile	1180~1220	用于用来抛光的印刷釉 Suitable for the printing glaze of polishing
DP1105	全抛釉印刷釉 Suitable for the printing glaze of full polishing tile	1180~1220	用于用来抛光的印刷釉 Suitable for the printing glaze of polishing

金属釉系列 METALLIC GLAZE

编号 code	适用温度 (°C) Suitable Temp.	特性 Feature	使用说明 Instruction
AG9803	1160~1190	银色 silver	适用于一次烧成地砖，釉面金属效果好， Suitable for single firing floor tiles with good metal effect.
AG9806	1180~1210	银色 silver	适用于一次烧成地砖，釉面金属效果好， Suitable for single firing floor tiles with good metal effect.
AG9808	1200~1230	银色 silver	适用于一次烧瓷质仿古砖，釉面金属效果好， Suitable for single firing floor tiles with good metal effect.
AG2007	1060~1120	银色 silver	适用于一次或二次烧成墙砖，釉面金属效果好， Suitable for single firing or double firing wall tiles with good metal effect.
AG9841	1190~1210	银色 silver	适用于一次烧瓷质仿古砖，釉面金属效果好， Suitable for single firing floor tiles with good metal effect.
AP1101	1150~1190	金属釉配套印刷釉 Printing powder for metallic glaze	
AP1102	1180~1230	金属釉配套印刷釉 Printing powder for metallic glaze	

* 以上AG98系列金属釉，可通过按比例混合来调整烧成温度，以适应不同厂家的不同的烧成温度。Temp. can adjust through mixing different glaze by different quantity.
* 以上各种金属釉可通过添加少量添加剂，以改变其金属效果，可调出黄铜、红铜等金属效果。Different color metal effect may get through extra material putting in the glaze. Such as yellow copper effect, red copper effect

底釉 (化妆土) 系列 ENGOBE SERIES

编号 code	类别 Category	适用温度 (°C) Temp.	使用说明 Instruction
DG1201	一次烧化妆土 Engobe for single firing	1100~1150	适用于一次烧墙地砖，可根据温度适当添加熔块， Suitable for single firing wall and floor tile, for temperature adjusting extra frit is necessary
DG1202	一次烧化妆土 Engobe for single firing	1130~1180	适用于一次烧墙地砖，可根据温度适当添加熔块， Suitable for single firing wall and floor tile, for temperature adjusting extra frit is necessary
DG1005T	二次烧化妆土 Engobe for double firing	1050~1130	适用于二次烧成内墙砖，白度佳，不含锆，不透水。可根据烧成温度调整熔块用量。 Suitable for double firing indoor wall tile, excellent whiteness without ZrSiO4, water proof, for temperature adjusting extra frit is necessary

成品印刷釉系列 COMPOUND PRINTING POWDER

编号 code	适用温度 (°C) Suitable Temp.	使用说明 Instruction
KP9602	1030~1080	二次烧透明光泽平板印刷釉 Double firing glossy and transparent flat printing powder
KP9603	1030~1080	二次烧透明哑光平板印刷釉 Double firing matt and transparent flat printing powder
KP9604	1170~1200	一次烧透明光泽平板印刷釉 Single firing glossy and transparent flat printing powder
KP9606	1140~1180	一次烧透明哑光平板印刷釉 Single firing matt and transparent flat printing powder
KP9602R	1030~1080	二次烧透明光泽胶滚印刷釉 Double firing glossy and transparent roto printing powder
KP9603R	1030~1080	二次烧透明哑光胶滚印刷釉 Double firing matt and transparent roto printing powder
KP9604R	1170~1200	一次烧透明光泽胶滚印刷釉 Single firing glossy and transparent roto printing powder
KP9606R	1140~1180	一次烧透明哑光胶滚印刷釉 Single firing matt and transparent roto printing powder

一次烧透明哑光胶滚印刷釉
Single firing matt and transparent roto printing powder


完善的陶瓷生产技术服务 CONSUMMATE CERAMIC TECHNICAL SERVICE

现代陶瓷日新月异，新产品、新技术层出不穷，由于我们在技术与研发投入大量资源，在人才方面拥有一批生产经验丰富的技术人员，现在我们的工艺技术服务遍及印度、巴基斯坦、土耳其、伊朗等国家。

Nowadays the ceramic products and ceramic technology are developing fast, we invested a lot of in R&D, meanwhile we boast a team of experienced technical professionals, and because of that we successfully offered our technical assistance to the countries like India, Pakistan, Turkey, Iran, and etc.

生产技术服务包括 THE TECHNICAL SERVICE INCLUDES

- 渗花抛光砖生产工艺技术 Soluble salts polishing tile production technology
- 微粉抛光砖生产工艺技术 Double charge polishing tile production technology
- 微晶复合板生产工艺技术 Glass-ceramic and tile compound board production technology
- 瓷质仿古砖生产工艺技术 Vitrified rustic tile production technology
- 半抛、全抛釉砖生产工艺技术 Semi polishing and full polishing tile production technology
- 金属效果釉生产工艺技术 Metallic effect glaze tile production technology
- 釉面墙地砖生产工艺技术 Glaze wall and Floor tile production technology

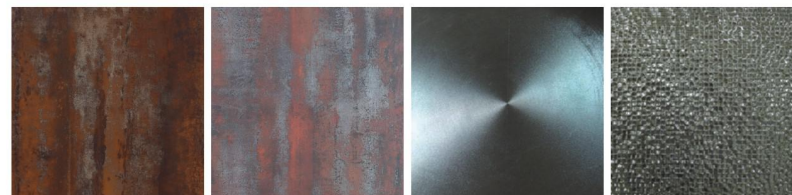

- 1、仿古砖技术服务 Technical service for GVT
- 2、抛光砖技术服务 Technical service for polishing tile
- 3、抛釉砖技术服务 Technical service for polishing GVT
- 4、金属釉砖技术服务 Technical service for metal rustic tile